



DAV 007-009-012



DAV 016

UPGRADE

+ PRODUCTS

- 220 ultra thin design and space saving.
- Optional air return design.
- High efficiency filter G3.
- EEV inside.
- Wired controller RWW05 included on standard.
- Ideal for hotel.



RWW05 (STD)



RCV02 (optional)



(infrared receiver to combined with RCV 01)



RWW03 (optional)



RWW07 (optional)

FEATURES




R410A FLUID

- Once the indoor unit placed in the ceiling, only the inlet and outlet grids can be seen.
- There are two air return design for different requirements for even more decoration options.
- Two choices of optional static pressure 0 Pa and 20 Pa for the low static pressure duct for a convenient use.
- The unit adopts G3 grade filter which can efficiently filter the dust and improve the room air quality.

DAV TECHNICAL DATA

Indoor unit		AWSI-DAV007-N11	AWSI-DAV009-N11	AWSI-DAV012-N11	AWSI-DAV016-N11
Code		7SP03H001	7SP03H002	7SP03H003	7SP03H004
RATED POWERS					
Cooling	kBtu/h	7.5	9.5	12.3	15.3
	kW	2.2	2.8	3.6	4.5
Heating	kBtu/h	8.5	10.9	13.6	17.1
	kW	2.5	3.2	4	5
ELECTRICAL PARAMETERS					
Power supply	Ph/V/Hz	1/220-230/50	1/220-230/50	1/220-230/50	1/220-230/50
PERFORMANCE					
Airflow	m³/h	400	400	500	850
Noise level (LS/MS/HS)	dB(A)	30/32/35	30/32/35	30/32/35	30/32/35
INSTALLATION					
External dimensions (WxHxD)	mm	610x220x500	610x220x500	610x220x500	1105x220x500
Shipping dimensions (WxHxD)	mm	710x280x549	710x280x549	710x280x549	1174x294x549
Net weight/Gross weight	kg	15/17	15/17	16/19	25/27
Liquid pipe diameter	inches	1/4"	1/4"	1/4"	1/4"
Suction pipe diameter	inches	3/8"	3/8"	3/8"	3/8"
Static pressure	Pa	20	20	20	20

Dimensions: 007-009-012 models

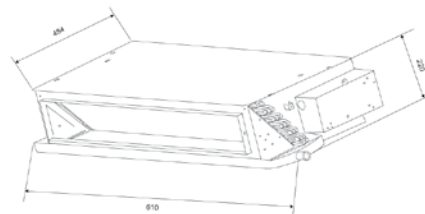

Dimensions: 016 model

